


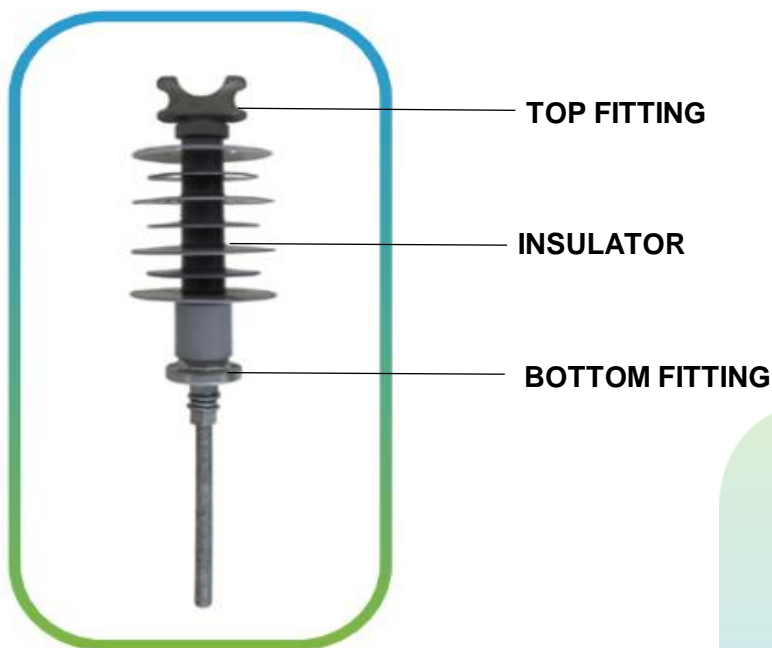


SUQMAelectric

PT. Surya Mulia Anugerah

TECHNICAL PARTICULAR AND GUARANTEE INSULATOR LINE POST POLYMER 24 kV

No.	DESCRIPTION	UNIT	TECHNICAL PARTICULAR
1	Rated Voltage	kV	24
2	Specified Cantilever Load (SCL)	kN	12,5
3	Specified Tensile Load (STL)	kN	12,5
4	Maximum Design Cantilever Load (MDCL)	kN	≥ 6,25
5	Height (H)	mm	≥ 300
6	Arc Distance	mm	≥ 270
		mm	≥ 220
7	Creepage Distance	mm	≥ 680
8	Wet-Power Frequency Resistance Voltage	kV	65
9	Lightning Impulse Resistance Voltage	kV	170
10	Hot Dip Galvanized		
	a) Bottom Fitting	µm	≥ 85
	b) Bolts, nuts, washers	µm	≥ 54
11	Silicone Rubber Grade		Class 1A 4,5
12	Applicable Standard		SPLN D3:027-2:2016
13	Identification Characters On Insulator Embossed		
			LPK 12,5 24 65/170 L
			SPLN D3:027-2:2016



PT Surya Mulia Anugerah

Jl. Kedoya Duri Raya, No.56E,

Jakarta Barat 11520

www.suryamulia.com