


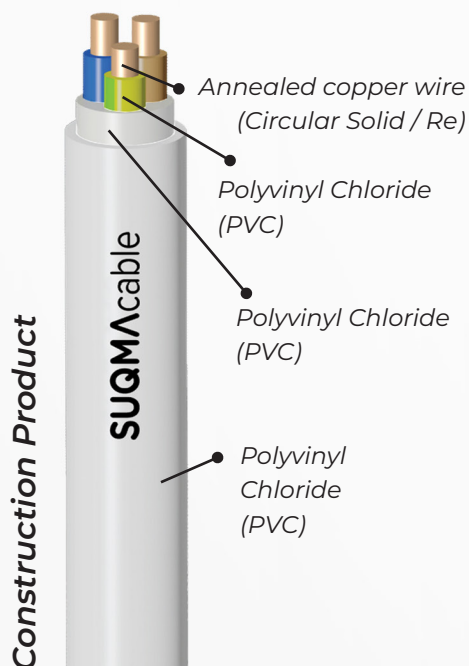

(Cu/PVC/PVC) NYM

Multi Core copper conductor PVC insulated and PVC Sheathed Cable

Reference Standard:

SNI 04-6629.4-2006

Rated Voltage:

300/500 V

Insulation Color:

Brown - Blue (2 Core)

Brown - Blue - Yellow/Green (3 Core)

Brown - Black - Grey - Yellow/Green (4 Core)

Application:

This cable is used for fixed installations in housing or buildings, this cable can be used in dry locations.

Dimensional Mechanical and Electrical Data

Size	Nominal Insulation Thickness	Diameter of insulation (Approx.)	Nominal Thickness outer sheath	Diameter cable (Approx.)	Weight of product (Approx)	Max. DC conductor resistance at 20°C	Min. insulation resistance at 70°C	Current carrying capacity in air		Standard delivery length
								at 30°C	at 40°C	
mm ²	mm	mm	mm	mm	kg/km	Ω/km	MΩ.km	A	A	m
2x1.5	0.7	2.8	1.2	8.7	125	12.1	0.010	19	16	50/100/coil
2x2.5	0.8	3.4	1.2	9.9	168	7.41	0.009	25	22	50/100/coil
2x4	0.8	3.8	1.2	10.8	214	4.61	0.0077	34	30	50/100/coil
2x6	0.8	4.3	1.2	11.8	270	3.08	0.0065	44	39	50/100/coil
2x10	1.0	5.5	1.4	15.0	442	1.83	0.0065	61	53	1,000/drum
3x1.5	0.7	2.8	1.2	9.2	145	12.1	0.010	19	16	50/100/coil
3x2.5	0.8	3.4	1.2	10.4	198	7.41	0.009	25	22	50/100/coil
3x4	0.8	3.8	1.2	11.4	258	4.61	0.0077	34	30	50/100/coil
3x6	0.8	4.3	1.4	12.8	345	3.08	0.0065	44	39	50/100/coil
3x10	1.0	5.5	1.4	15.8	545	1.83	0.0065	61	53	1,000/drum
4x1.5	0.7	2.8	1.2	9.9	172	12.1	0.010	19	16	50/100/coil
4x2.5	0.8	3.4	1.2	11.3	237	7.41	0.009	25	22	50/100/coil
4x4	0.8	3.8	1.4	12.8	326	4.61	0.0077	34	30	50/100/coil
4x6	0.8	4.3	1.4	14.4	438	3.08	0.0065	44	39	50/100/coil
4x10	1.0	5.5	1.4	17.2	667	1.83	0.0065	61	53	1,000/drum

Note: The following is general information, for further information please contact our marketing.